



# Specification Information

**Product Code:** 199-R

**Product Name:** Toilet Seat Cover Dispenser, Recessed


**Individual Carton UPC:** 624622199906

**Individual Carton Shipping Dimensions:** 45.7cm W x 35.6cm H x 7.6cm D (18" W x 14" H x 3" D)

**Individual Carton Shipping Weight:** 2.7 kg (6 lbs)

**\*Note:** Special order item with 100 unit minimum

**Site Location:** Frost's 199-R recessed stainless steel toilet seat cover dispenser is a high quality product. This economical unit is available in two finishes to suit both institutional and commercial applications. Typically, the dispenser is used in schools/universities, restaurants, malls, office buildings, condominiums, fitness facilities, and recreation centres. The ease of use, sleek appearance and high quality of this product make it a popular choice.

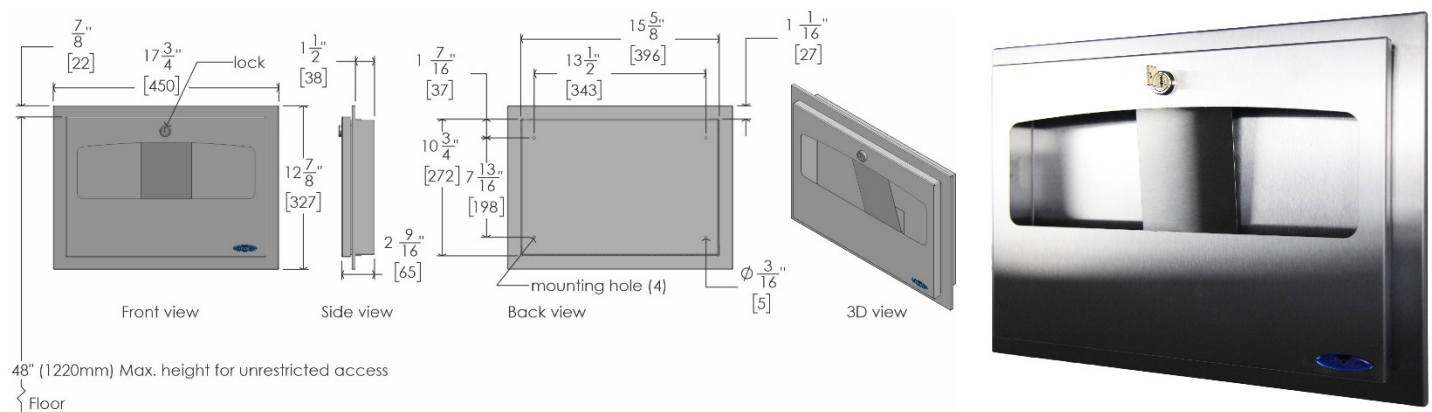

## Features:

- Straightforward design makes this product user friendly and also reduces the risk of product malfunction
- Non-proprietary dispenser which can lead to cost savings for end users and property managers
- Easily accessible front loading
- Durable construction of Canadian steel to help ensure a long-lasting product life
- Door secured with keyed tumbler lock

**Dispensing:** This product dispenses toilet seat covers manually from the front of the unit. The dispenser is also universal; meaning, the unit is non-proprietary and dispenses paper from standard commercial paper producers. This allows the end user to avoid getting locked into paper supply contracts and should save them money on their janitorial supplies. To load this product, manually insert desired seat covers into the front of the unit.

## Capacity:

- Will accept all standard half fold toilet seat covers

## Materials:

- All stainless steel construction of 22 gauge type 430 brushed finish

## Product Dimensions:

- 45.1cm W x 32.8cm H x 6.6cm D (17.75" W x 12.9" H x 2.6" D)

Frost Products Ltd

5276 John Lucas Drive  
Burlington, ON, Canada, L7L5Z9

(905) 332-5700  
1-800 667-5094

info@frostproductsltd.com  
www.frostproductsltd.com



# Specification Information

**Product Weight:**

- 2.5 kg (5.5 lbs)

**Installation Guidelines:** For unrestricted access, bottom of the unit to floor must be between 38.1cm to 121.9cm (15" to 48"). This dispenser comes with four standard combination style screws and one key. Provide rough opening: 40.6cm W x 28.2cm H x 4.1cm D (16" W x 11 $\frac{1}{8}$ " H x 1 $\frac{5}{8}$ " D). Mark mounting holes against the mounting surface using a pencil and level. Use a screwdriver or power drill to drill screws in the desired mounting surface and attach the dispenser. Please note that it is recommended that all installations be conducted by a qualified tradesperson. Please read and follow any additional installation guidelines provided with the products.

**Maintenance:** Normal preventative maintenance and cleaning will keep Frost products functioning properly and may extend normal product life. Products should be wiped down with a damp soft cloth periodically. Approved stainless steel cleaner may be used to clean scuffs or fingerprints on stainless surfaces. Do not use harsh detergents or chemical cleaners. For stainless steel please do not spray with any product containing bleach, acids, or chlorides, which can be found in many cleaning products such as toilet bowl cleaners. Use of these cleaning solutions may cause discolouration and if used for prolonged periods of time they can eat away at points in the stainless steel. If discolouration occurs, the use of an approved stainless steel cleaner and a firmer scrub pad, such as a Scotch Brite Pad #7447, may remove the markings. Wipe away any debris from the area and gently rub with the pad. Then spray the area with a stainless steel cleaner/polish and rinse and dry. Always wipe with the grain direction for stainless steel products. If a cleaning agent has begun to eat away at the steel on a unit then the unit will likely need to be replaced. The stainless steel that Frost Products uses is of high quality and stainless steel is resistant to rust. However, discolouration that appears to be rust can be caused by cleaning solutions and soaps mentioned above. It is important to discontinue use of any cleaning agent or soap if discolouration begins to occur. Clean off the discolouration as quickly as possible to avoid any permanent damage to the unit. Maintenance staff should be taught how to recognize the signs that they are not using the appropriate cleaning products and how to correctly maintain stainless steel items.

**Warranty:** If any product or part proves to be defective within 12 months from date of shipment from the factory it will be repaired or replaced without any charge including freight costs when authorized. Costs resulting from the installation or removal of defective products are not covered under this warranty. Discolouration to stainless steel parts resulting from exposure to harsh environmental and / or chemicals are not considered to be defects in workmanship or material and are not covered under warranty.